


Xiamen Linkup Magnet Co.,Ltd.
Catalog of Neodymium Magnetic Hook




1.NdFeB Magnetic Hook With Fixed Hook




Model	D(mm)	d(mm)	M	h(mm)	h1(mm)	H(mm)	Weight(g)	Pull Force(kg)
HSNE12	12	6	M3	5	12.5	33	7	4
HSNE16	16	6.5	M4	5	12.6	35	12	8
HSNE20	20	6.5	M4	7	14	36	21	12
HSNE25	25	7.5	M5	8	17	45	37	25
HSNE32	32	10	M6	8	18	48	61	34
HSNE36	36	10	M6	8	18	48	69	50
HSNE42	42	10	M6	8.6	18	48	101	72
HLNE48	48	12	M8	11	24	61	182	81
HLNE55	55	12	M8	12	28	64.5	252	95
HLNE60	60	12	M8	15	28	64.5	362	160
HLNE70	70	17	M10	17	34	80	566	200
HLNE75	75	17	M10	18	35	10	681	270
HLNE80	80	17	M10	18	35	81	761	300

2.NdFeB Magnetic Hook With Eyebolt Hook




Model	D(mm)	d(mm)	h(mm)	h1(mm)	H(mm)	M	Weight(g)	Pull Force(kg)
HSNF12	12	6	5	12.5	33	M3	8	4
HSNF16	16	6.5	5	12.6	35	M4	12	8
HSNF20	20	6.5	7	14	36	M4	21	12
HSNF25	25	7.5	8	17	45	M5	38	25
HSNF32	32	10	8	18	48	M6	63	34
HSNF36	36	10	8	18	48	M6	71	50
HSNF42	42	10	8.6	18	48	M6	106	72
HLNF48	48	12	11	24	61	M8	187	81
HLNF55	55	12	12	28	64.5	M8	257	95
HLNF60	60	12	15	28	64.5	M8	367	160
HLNF70	70	17	17	34	80	M10	582	200
HLNF75	75	17	18	35	10	M10	697	270
HLNF80	80	17	18	35	81	M10	777	300

3.NdFeB Magnetic Hook With Swivel Hook

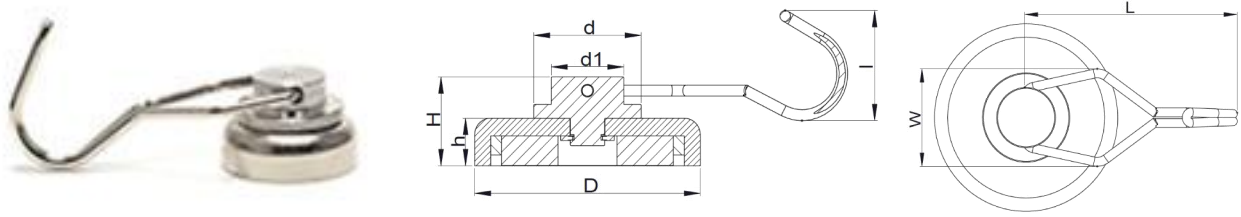

Model	D (mm)	d (mm)	d1 (mm)	h (mm)	H (mm)	L (mm)	W (mm)	I (mm)	Weight (g)	Vertical Breakaway (Kg)	Side Breakaway (kg)
HSNG25	25	20	13.5	8	15.5	53.5	23	24	38	17	3.5
HSNG32	32	20	13.5	8	15.5	53.5	23	24	52	30	5.5
HSNG36	36	20	13.5	8	15.5	53.5	23	24	65	40	6.5
HSNG42	42	20	13.5	8.6	16.1	53.5	23	24	92	60	8

4.NdFeB Rotary Plastic Magnetic Hook

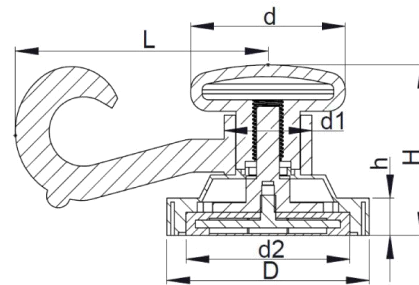

Model	D(mm)	d(mm)	d1(mm)	d2(mm)	H(mm)	h(mm)	L(mm)	Weight(g)	Side Breakaway (kg)
HSTG43	53	35	22.5	43	43.5	10	65	55	2.5
HSTG66	68.2	35	22.5	66	51	13.8	65	139	10

Features of magnetic hook

1. Neodymium magnetic hooks have great magnetic force and are suitable for heavy duty application.
2. Rotary plastic magnetic hook coated with rubber base, to protect the contact surface from scratching.
3. Rubber coated magnetic hook protect the surface from scraping and increase the vertical friction.
4. Ferrite magnetic hook will be more economical, if the required pull force is not high, it's the best option.

Xiamen Linkup Magnet Co.,Ltd

Room 506, No. 319-9, Hubin East Road, Siming District, Xiamen, Fujian Province, China.

Tel: +86-592-2069826


Email: Sales@linkupmagnets.com

Website: www.linkupmagnets.com

Xiamen Linkup Magnet Co.,Ltd.
Catalog of Rubber Coated Magnetic Hook




1. Rubber Coated Magnetic Hook With Fixed Hook




Model	D(mm)	H(mm)	L(mm)	Weight(g)	Pull Force(kg)
HRSS22	22	32	8	15	3.5
HRSS31	31	32	8	25	7.5
HRSS43	43	32	8	35	10
HRSS66	66	40	12	110	22
HRSS88	88	52	16	205	45

2. Rubber Coated Magnetic Hook With Eyebolt Hook




Model	D(mm)	H(mm)	d(mm)	Weight(g)	Pull Force(kg)
HRSP22	22	32	8	15	3.5
HRSP31	31	32	8	25	7.5
HRSP43	43	32	8	35	10
HRSP66	66	40	12	110	22
HRSP88	88	52	16	205	45

3. Magnetic Hook With Red Rubber Coated




Model	D(mm)	d(mm)	h(mm)	H(mm)	M	Weight(g)	Pull Force(kg)
HLSE45	45	13	25.5	75	M6	206	50

1.Ferrite Magnetic Hook With Fixed Hook



Model	D(mm)	d(mm)	M	h(mm)	h1(mm)	H(mm)	Weight(g)	Breakaway(kg)
HSFE25	25	6.5	M4	7.4	15.5	37.5	25	4.5
HSFE32	32	6.5	M4	6.9	15.6	37.6	34	8.5
HSFE36	36	6.5	M4	7.9	16	38	48	11
HSFE40	40	7.5	M5	7.9	17.9	45.4	58	13
HSFE47	47	7.5	M5	9	18.5	46	88	18
HSFE50	50	7.5	M5	9.9	19.4	46.9	109	23
HSFE57	57	7.5	M5	10.4	19.9	47.5	148	29
HSFE63	63	10	M6	14	25.5	55	220	36
HSFE80	80	10	M8	18	31.2	67.5	430	62

2.Ferrite Magnetic Hook With Eyebolt Hook



Model	D(mm)	d(mm)	h(mm)	h1(mm)	H(mm)	M	Weight(g)	Breakaway(kg)
HSFF25	25	6.5	7.4	15.5	37.5	M4	25	4.5
HSFF32	32	6.5	6.9	15.6	37.5	M4	34	8.5
HSFF36	36	6.5	8	16	38	M4	48	11
HSFF40	40	7.5	8	18	45.5	M5	58	13
HSFF47	47	7.5	9	18.5	46	M5	88	18
HSFF50	50	7.5	9.9	19.5	47	M5	109	23
HSFF57	57	7.5	10.4	20	47.5	M5	148	29
HSFF63	63	10	14	25.5	55	M6	220	36
HSFF80	80	10	18	31	67.5	M8	430	62